


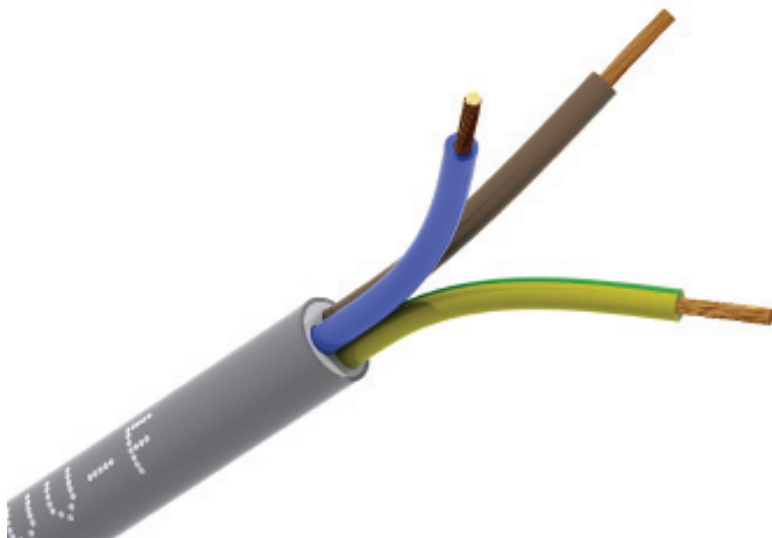

INFORMATION

Applications	Flexible wire insulation and thermoplastic cover (PVC) to connect to the network appliances.
Standard	UNE-EN 50525-2-11 UNE-EN 60332-1-2 (Flame propagation) IEC 60227-5 IEC 60332-1-2 (Flame propagation)
Conductor	Flexible copper class 5 according to UNE-EN 60228. IEC 60228
Tensión nominal U_0/U	300 - 300V
Tensión ensayo	2.000 V en CA
Minimum temperature test	-15°C
Operating temperature	70°C
Insulation	PVC tipo TI-2 according to UNE-EN 50363-3, EN 50363-3
Sheathing	PVC tipo TM-2 according to UNE-EN 50363-4-1, EN 50363-4-1
Insulation Color	Colors UNE 21089 and HD 308 S2, color coded for less than five drivers and UNE-EN 50334
Cover Color	Gray
Print	AENOR <HAR> PEVI H03VV-F

PRODUCT

Section	0,5 and 0,75 mm ²
Manufacturing range	2 to 5 wires

Further dimensions and compositions on demand.