


H05V3V3D3H6-F

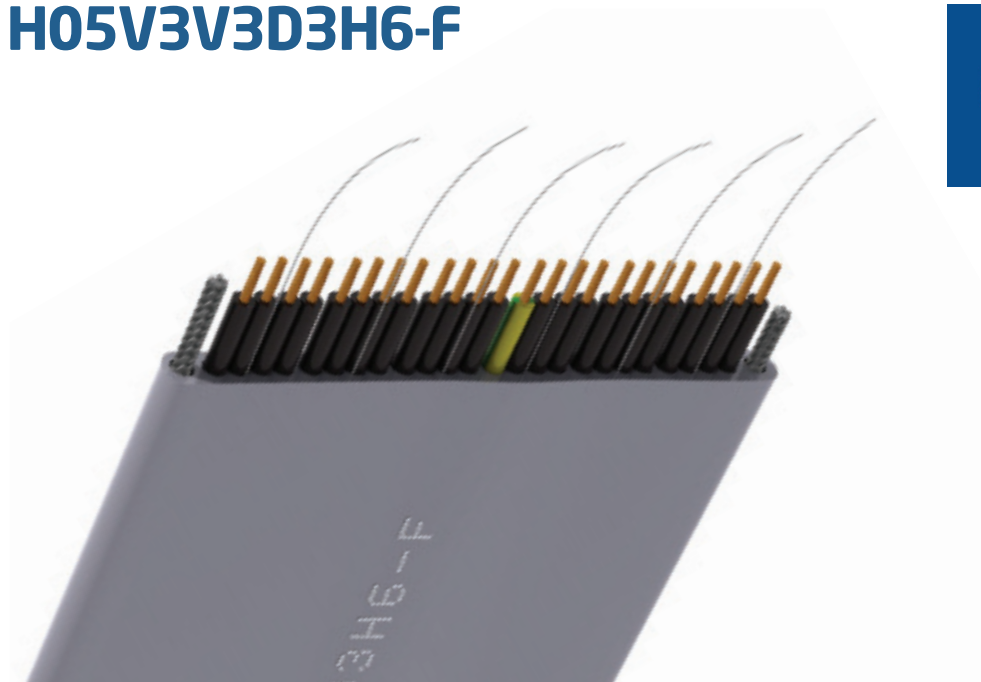

INFORMATION

Applications	Flexible cable suspended maneuver control or small power in lifts and hoists long haul.	
Standard	UNE-EN 50214 UNE-EN 60332-1-2; IEC 60332-1-2 (Flame propagation)	
Conductor	class 5 according to UNE 60228	
Electrical properties	300 - 500V	
Service temperature	-15° to 70°C	
Running speed	6,3 m/seg	
Lenght	Suspension 80 m	Fixed 160 m
Colour	Grey	
Insulation and sheathing	PVC	

SECTION PRODUCT INFORMATION 0,75

Cores number	16	24
Section	0,75 mm ²	
Copper composition	24 Wire x 0,20 mm	
Insulated conductor diameter	2,2 mm	
Colour code	Black, white numbered, G: green/yellow	
Max. conductor resistance	26 Ohm/Km	
Dimension approx. mm	4,20x50	4,20x71
Weight approx. Kg/100m	34	51
Copper content approx.	115,200	172,800
Loop	10 x Cable height	
Diameter flex.	500 mm	
Suspension elements	2 steel fasteners 2 mm diameter.	
Test voltage	2000 V	

Further dimensions and compositions on request.