


H05VV-F

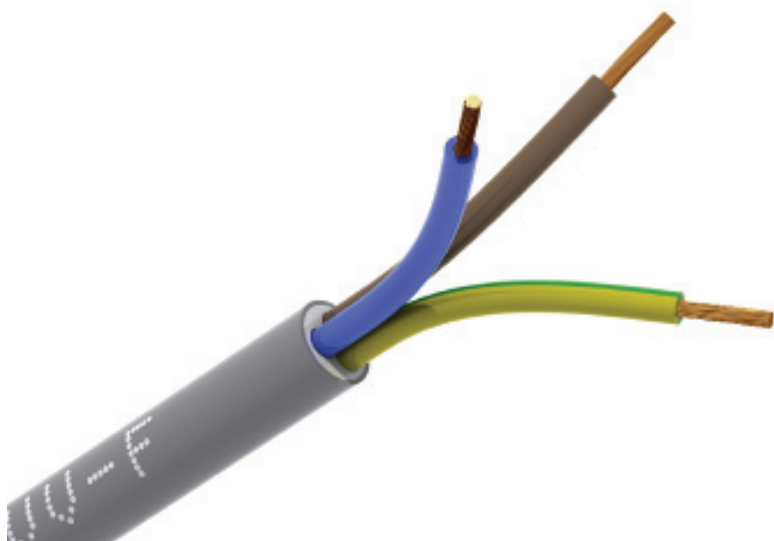

INFORMATION

Applications	Flexible wire insulation and thermoplastic cover (PVC) to connect to the network appliances.
Standard	UNE-EN 50525-2-11 UNE-EN 60332-1-2 (Flame propagation) IEC 60227-5 IEC 60332-1-2 (Flame propagation)
Conductor	Flexible copper class 5 according to UNE-EN 60228, IEC 60228
Tensión nominal U_0/U	300 - 500V
Loop	3D
Minimum temperature test	-15°C
Operating temperature	70°C
Dimensions	According to UNE-EN 50525-2-11 IEC 60227-5
Insulation	PVC
Sheathing	PVC
Printing	AENOR <HAR> PEVI H05VV-F

PRODUCT

Section	0,75 a 2,5 mm ²
Manufacturing range	2 to 5 wires

Further dimensions and compositions on demand.