


# 03Z1Z1-F

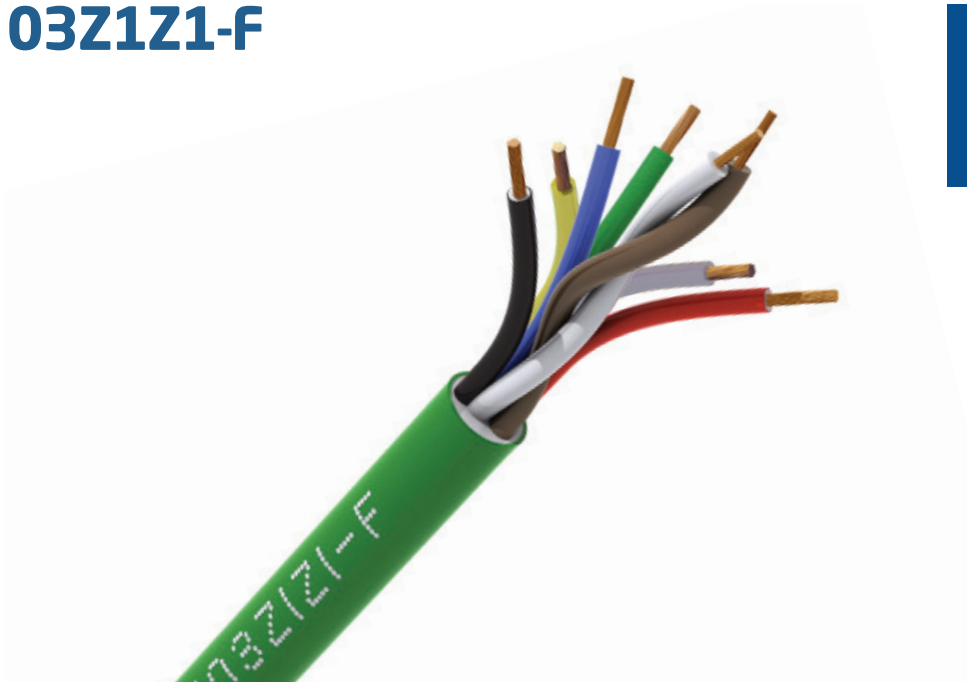

## INFORMATION

<b>Applications</b>	Flexible wire insulation and halogen free deck for fixed installations. Especially suitable for installations where the cable safe behavior against fire required.
<b>Standard</b>	UNE-EN 60332-1-2 (flame propagation) IEC 60332-1-2 UNE-EN 61034-2 (Smoke density) Determination of halogens: UNE-EN 50267-2-2 (pH and conductivity) UNE-EN 50267-2-1 (chlorine and bromine content) EN 50525-1 Appendix C UNE-EN 60684-2 (fluorine content)
<b>Conductor</b>	Electrolytic copper, class 5 according to UNE-EN 60228. IEC 60228.
<b>Nominal voltage</b>	300 V
<b>Test voltage</b>	1.500 V AC
<b>Minimum temperature test</b>	-15°C
<b>Max. operating temperature</b>	70°C
<b>Insulation</b>	Halogen free
<b>Insulation color</b>	Según especificación del cliente.
<b>Loop</b>	4D
<b>Cover</b>	Halogen free
<b>Color cover</b>	Green
<b>Print</b>	PEVI L.H N X SECTION MM2 F-2014 *HALOGEN FREE*

## PRODUCT INFORMATION

<b>Cores number</b>	2	3	4	6	8	10
<b>Section</b>	0,25 - 0,34	0,25	0,25	0,25	0,25	0,25

Other dimensions and compositions on demand.