


4CAT 7 S/FTP + Steel Supports

PVC

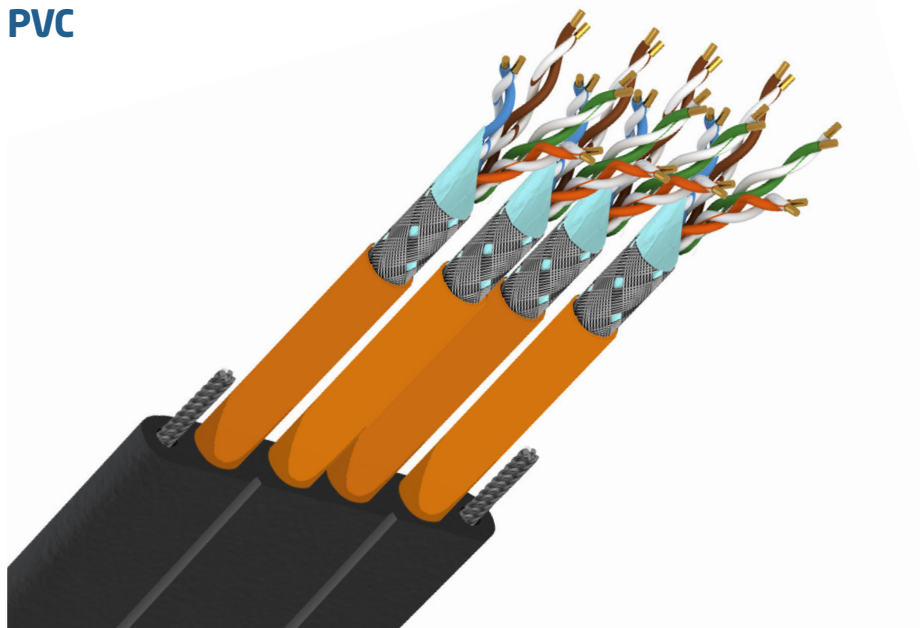

INFORMATION

Standard	ISO /IEC 11801 TIA/EIA 568 B2 26 AWGx4P
Electrical properties	250V
Service temperature	-15° to 70°C
Running speed	8 m/seg
Aceleration max.	1.2 m/s ²
Lenght max.	Suspension 180 m
Colour	Black
Insulation	LSZH
Sheath	Black PVC type TM2 EN 50363-4-1
Data elements	4 CAT 7 S/FTP Flex. LSZH
Test voltage	Not applicable
Dimension approx.	8.5 ± 0.7 mm x 42.4 ± 3.0 mm
Static flexibility	580 mm
Suspension elements	2 steel fasteners 3 mm diameter.
Minimun bending radius	>7xAD
Total weight approx.	470 Kg/Km

SPECIFICATIONS CAT 7 S/FTP FLEX

Applications	Class F: Ethernet, Fast Ethernet, Gigabit Ethernet, 10 Gigabit Ethernet
Standard	EN 50173; EN 50288; IEC 60332-1; IEC 61156-6; ISO/IEC 11801
Sheath color	Orange
Higher heating value	376 MJ / km
Overall screen	Tinned copper braid
Halogen-free	Yes
Outer sheath	LSZH
Individual screen	Aluminium / Polyester tape
Cable Type	S / FTP

Further dimensions and compositions on request.

