


# BRAIDED GAVEL

## HALOGEN FREE

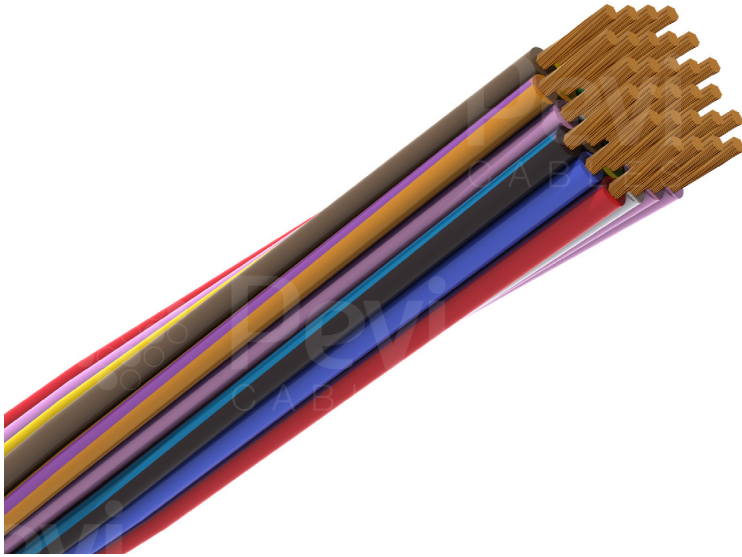

### INFORMATION

<b>Applications</b>	Electricity transmission in fixed installation in public places.
<b>Standard</b>	UNE-EN 50525-3-31 EN 61034-2 IEC 60332-1-2 UNE - EN 60332-1-2 (Flame propagation)
<b>Conductor</b>	Flexible copper class 5 according to UNE-EN 60228. IEC 60228
<b>Tensión nominal U<sub>0</sub>/U</b>	E505Z1-K :300 - 500V H07Z1-K :450 - 750V
<b>Diameter</b>	E505Z1-K 0.75 mm <sup>2</sup> : 2.20 mm + 0.1mm/ -0.05 mm H07Z1-K 1.5 mm <sup>2</sup> : 2.80 mm + 0.1 mm/-0.05mm H07Z1-K 2.5 mm <sup>2</sup> : 3.50 mm + 0.1 mm/-0.05mm
<b>Minimum temperature service</b>	-40°C (statics with protection)
<b>Operating temperature</b>	70°C
<b>Insulation</b>	Halogen Free
<b>Colours</b>	According to customer demand