


# H05VV-F

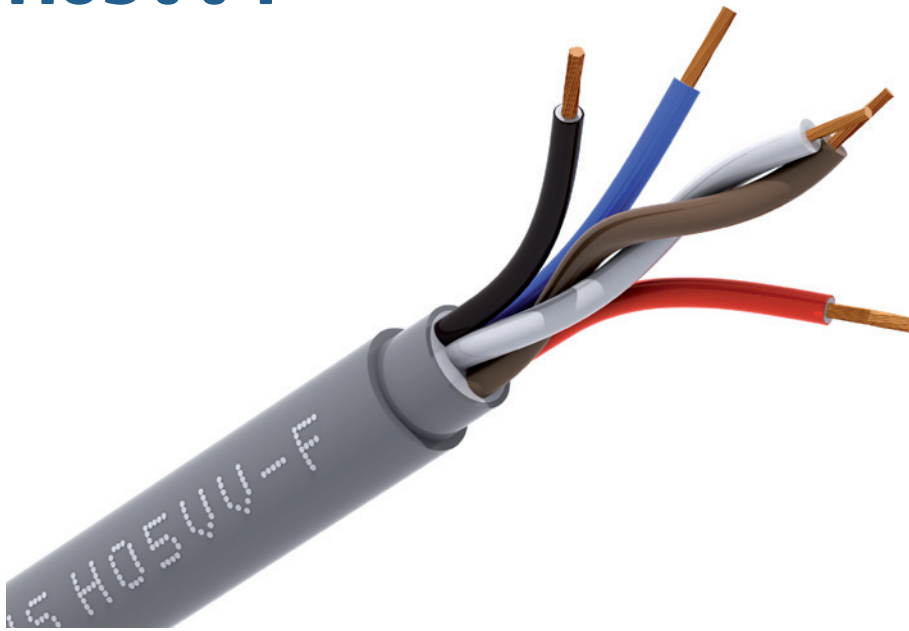

## INFORMATION

<b>Applications</b>	Fixed installations
<b>Standard</b>	UNE-EN 60332-1-2 (Flame propagation) ISO-11898
<b>Conductor</b>	Copper class 5 according to UNE-EN 60228
<b>Construction</b>	3x0.75 mm <sup>2</sup> + 2 x0.75 mm <sup>2</sup>
<b>Tensión nominal</b>	500V
<b>Data element</b>	Twisted pair-11898 ISO. unshielded
<b>Service temperature</b>	-15°C to 70°
<b>Impedance</b>	120 Ohm (+/- 10%) a 1 Mhz
<b>Inner diameter wires</b>	2.20 mm (+/- 0.1 mm) R/Bk/B 2.30 mm (+/- 0.1 mm) Br/Wh
<b>Insulation</b>	PVC R/Bk/B High density polyethylene Br/Wh
<b>Cover</b>	PVC
<b>Color</b>	Grey
<b>External diameter</b>	8.70 mm (+/- 0.3 mm)