


# H05V3V3D3H6-F

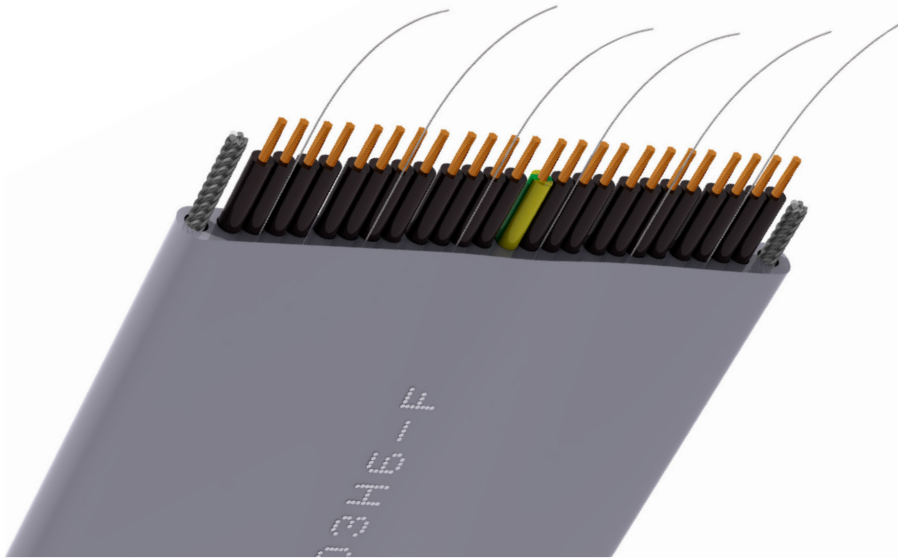

## INFORMATION

<b>Applications</b>	Flexible cable suspended maneuver control or small power in lifts and hoists long haul.	
<b>Standard</b>	UNE-EN 50214 UNE-EN 60332-1-2; IEC 60332-1-2 (Flame propagation)	
<b>Conductor</b>	class 5 according to UNE 60228	
<b>Electrical properties</b>	300 - 500V	
<b>Service temperature</b>	-15° to 70°C	
<b>Running speed</b>	6.3 m/seg	
<b>Length</b>	Suspension 110 m	Fixed 220 m
<b>Colour</b>	Grey	
<b>Insulation and sheathing</b>	PVC	

## SECTION PRODUCT INFORMATION 0.75

<b>Cores number</b>	16	24
<b>Section</b>	0.75 mm <sup>2</sup>	
<b>Copper composition</b>	24 Wire x 0.20 mm	
<b>Insulated conductor diameter</b>	2.2 mm	
<b>Colour code</b>	Black, white numbered, G: green/yellow	
<b>Max. conductor resistance</b>	26 Ohm/Km	
<b>Dimension approx. mm</b>	4.20x50	4.20x71
<b>Weight approx. Kg/100m</b>	34	51
<b>Copper content approx.</b>	115.200	172.800
<b>Min. bending radius</b>	10 x Cable height	
<b>Natural loop</b>	500 mm	
<b>Suspension elements</b>	2 steel fasteners 2 mm diameter.	
<b>Test voltage</b>	2000 V	

Further dimensions and compositions on request.